



FENCE NOTES


1. USE 3,000-PSI CONCRETE, FULLY CONSOLIDATED AROUND THE POST.
2. WHERE THE POST IS SET IN ROCK OR CONCRETE, CORE A HOLE 12" DEEP AND 1" LARGER IN DIAMETER THAN THE POST. SET THE POST AND GROUT IN PLACE USING NON-SHRINK GROUT.
3. ALL POSTS MUST BE PLUMB AND ALIGNED WITH ONE ANOTHER IN BOTH HORIZONTAL AND VERTICAL PLANES.
4. CORNERS AND GATEPOSTS FOR CHAIN LINK FENCES SHALL EXTEND ABOVE THE TOP STRAND OF BARBED WIRE TO PROVIDE TENSIONING FOR THE BARBED WIRE.
5. PROVIDE MIDRAILS AND BRACING AT ALL CORNER POSTS WHERE THE FENCE CHANGES DIRECTION BY MORE THAN 30 DEGREES.
6. THE GRADE OF THE SITE AND INSTALLATION OF THE FENCE SHALL PROVIDE FOR NO MORE THAN A 1" GAP BETWEEN THE BOTTOM OF THE FENCE MATERIAL AND FINISH GRADE.
7. CONTRACTOR SHALL PROVIDE HOLD OPEN DEVICES FOR ALL GATES AT THE SPECIFIED OPEN POSITIONS, DRIVEN PIPE TYPE RECEIVERS ARE NOT AUTHORIZED.
8. CONTRACTOR SHALL ALSO PROVIDE A MUSHROOM TYPE RECEIVER AT THE CLOSE POSITION.

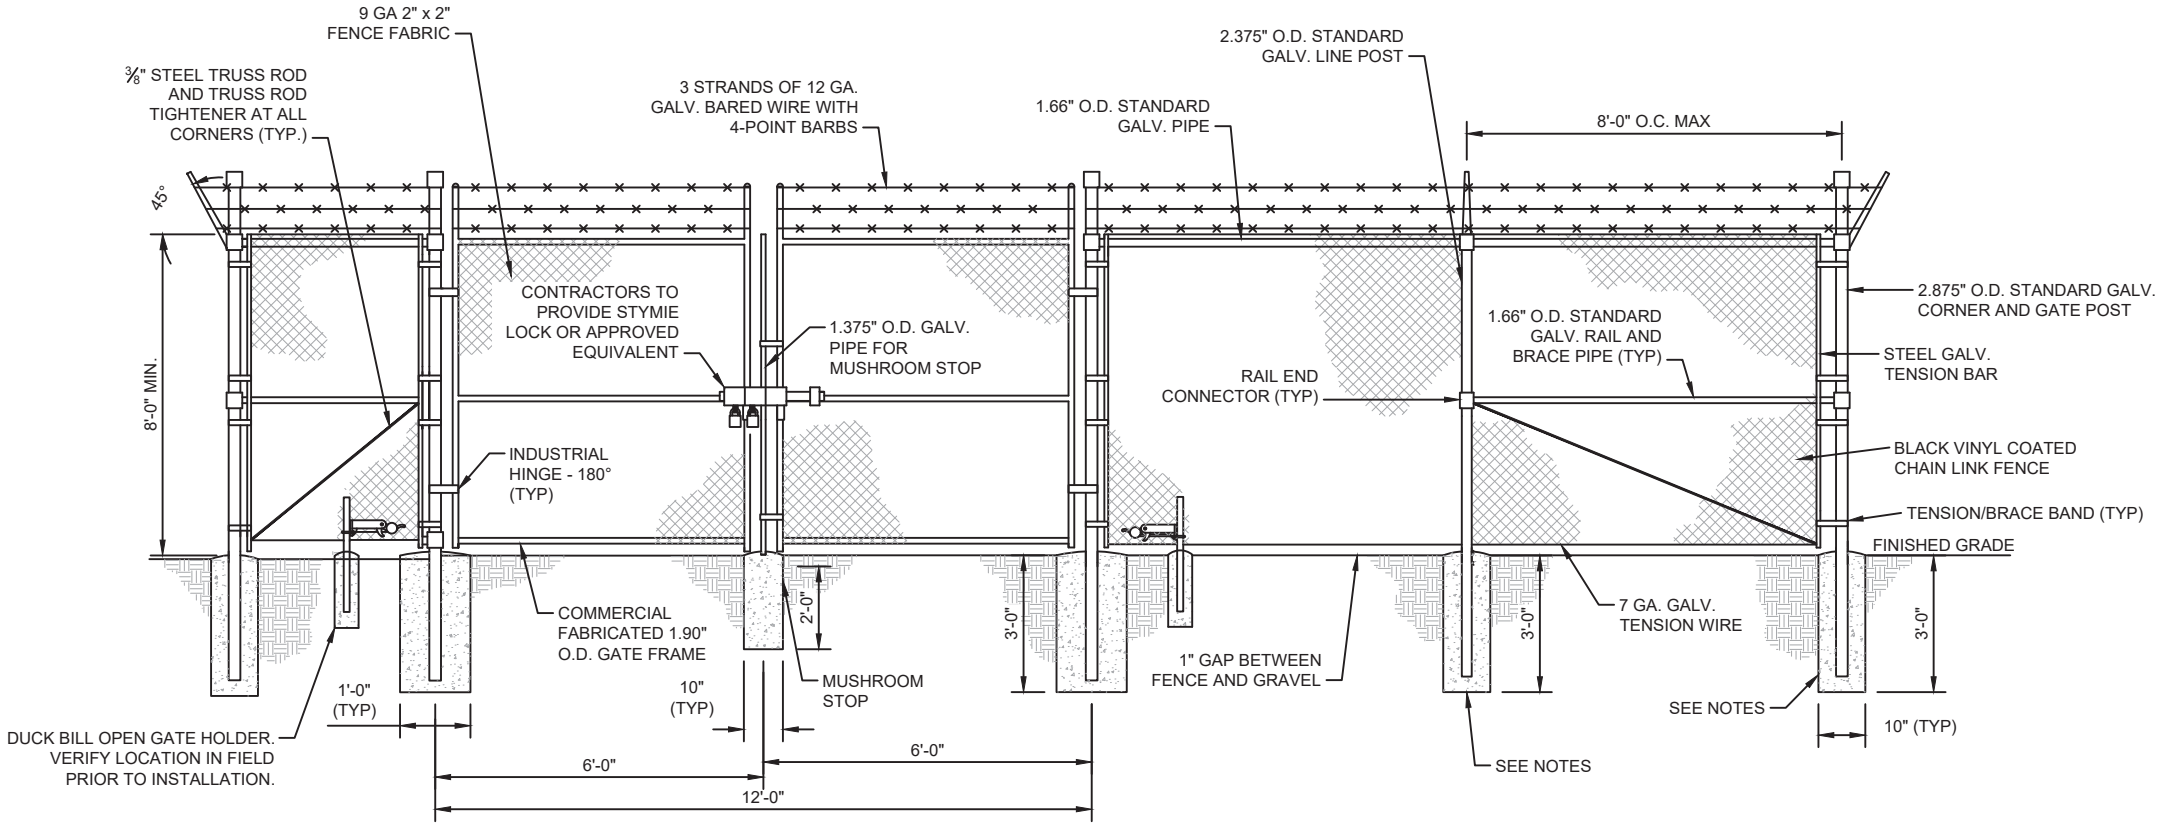


1 TYPICAL FENCE AND GATE DETAIL
SCALE: N.T.S.

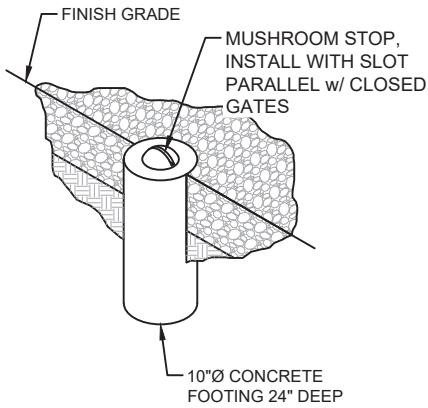

2 MUSHROOM STOP
SCALE: N.T.S.

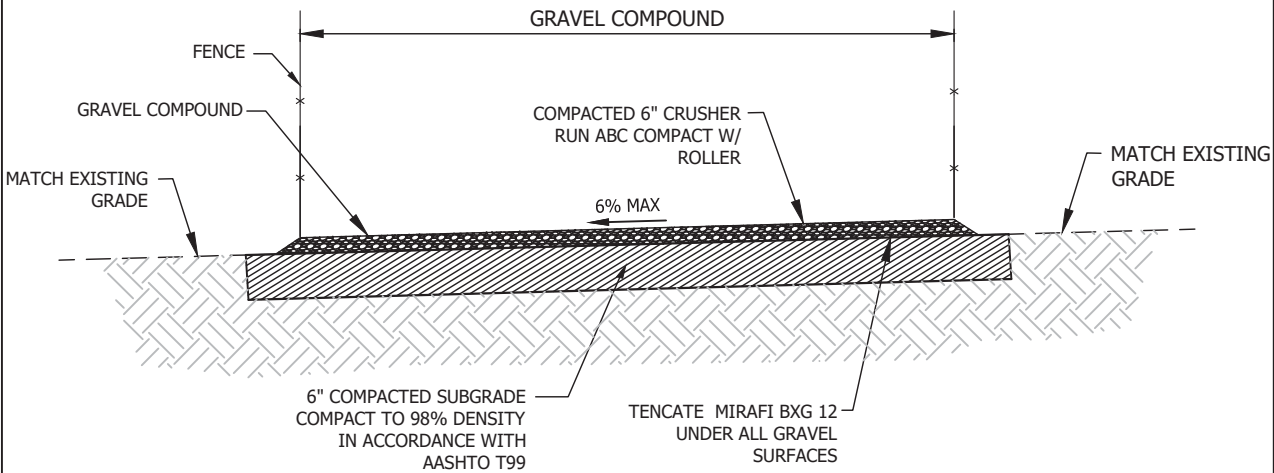

3 ON GRADE GRAVEL COMPOUND SECTION
SCALE: N.T.S.

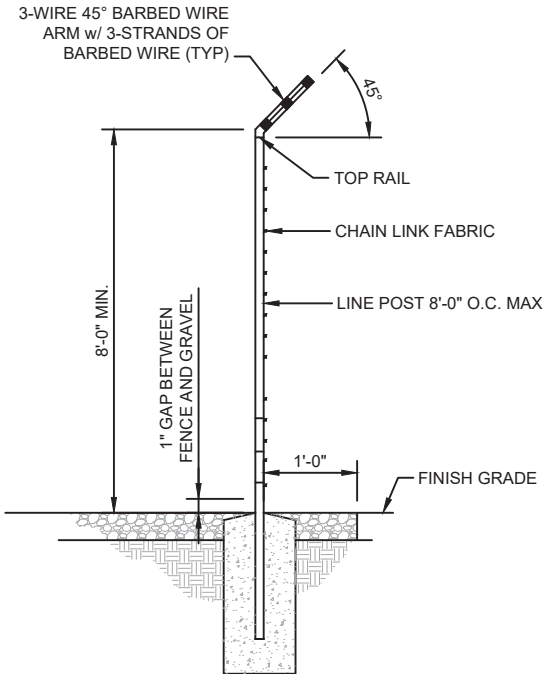

4 SECTION AT FENCE
SCALE: N.T.S.




DAIS TOWER
TOWER 5
LAKE NONA
POITRAS
BOGGY CREEK ROAD
ORLANDO, FL 32827
ORANGE COUNTY
TAX PARCEL 31-24-31-7793-15-001
PROPOSED 147' MONOPINE

PROJECT NO: G165625.001.01

CHECKED BY: DLS

ISSUED FOR:			
REV	DATE	DRWN	DESCRIPTION
B	4/28/23	BCT	PRELIMINARY DRAWINGS
C	4/28/23	MAS	PRELIMINARY DRAWINGS
D	4/28/23	MAS	SUBMITTAL

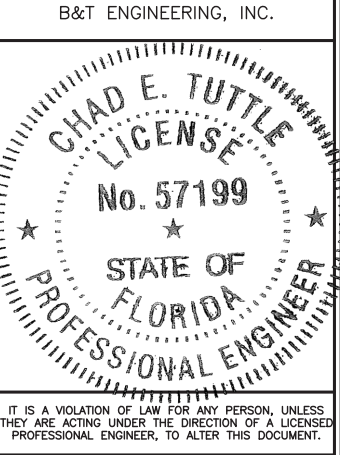

FENCE, GATE, AND
COMPOUND
DETAILS

SHEET NUMBER:
C-4